


ABOUT THE 4X6 HEADLIGHTS

FireTech LED Headlights are a simple way to dramatically boost the total light output of your emergency vehicle. These fixtures are a direct replacement for most 4" x 6" halogen headlights found on today's apparatus. The FireTech headlights are feature a unique beam pattern which optimized light output in the areas important to firefighters when working on scene. The FireTech 4x6 headlight also features an integrated halo Park lamp rung around the outer edge of the fixtures, giving the truck a modern automotive look and feel. Many customers choose to wig-wag these halos vs the headlights themselves which allows the headlights to perform ONLY the job they were intended for (illuminating the roadway)

The FireTech 4X6 headlights are DOT Compliant for use in all are regulated by FMVSS108 and are backed by the industries only LIFETIME Warranty.

Key Features:

- Mechanically attached GORE PolyVent for moisture control
- High Visibility LED Park Halo
- Direct Drop-in replacement
- High / Low Beam and High-Only Modes
- Chassis-Specific Accessories Available

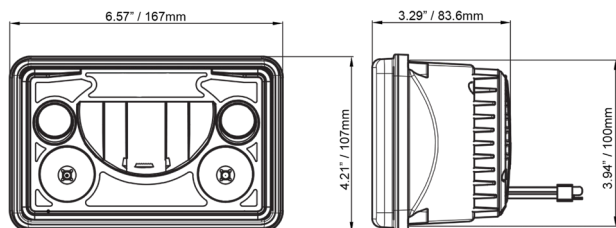


FT-4X6 HEADLIGHT SPECS


BEAM MODES	PARK LAMP, LOW, HIGH / HIGH ONLY
DIMENSIONS	6.57" X 3.94" X 3.29"
WATTAGE (PARK)	8 WATTS
WATTAGE (HL LOW)	18 WATTS
WATTAGE (HL HIGH)	9 WATTS
WATTAGE (H HIGH)	33 WATTS
INPUT VOLTAGE	9-32V DC

Model #	Description	Beam Modes	Wattage	Voltage Range	Amp. Draw	Dimensions
FT-4X6-4KIT	4X6 Headlight Kit Containing 4 Headlights: 2 High/Low & 2 High Only	High/Low, Park Lamp, High Only	152W	9-32V DC	12.67 @ 12v DC	6.57" X 3.94" X 3.29"
HV-4X6-HL-KIT	4X6 Headlight Kit Containing 2 High / Low Headlights	High/Low, Park Lamp	70W	9-32V DC	5.83 @ 12v DC	6.57" X 3.94" X 3.29"
FT-4X6-HL	Individual 4X6 Headlight DOT High / Low (For Low Beam Use in 4 headlight systems)	High/Low, Park Lamp, High Only	35W	9-32V DC	2.92 @ 12v DC	6.57" X 3.94" X 3.29"
FT-4X6-H	Individual 4X6 Headlight DOT High Beam Only (For use in 4 headlight systems)	High/Low, Park Lamp, High Only	41W	9-32V DC	3.42 @ 12v DC	6.57" X 3.94" X 3.29"


Wiring diagram to operate the FireTech Headlights in compliance with FMVSS and DOT

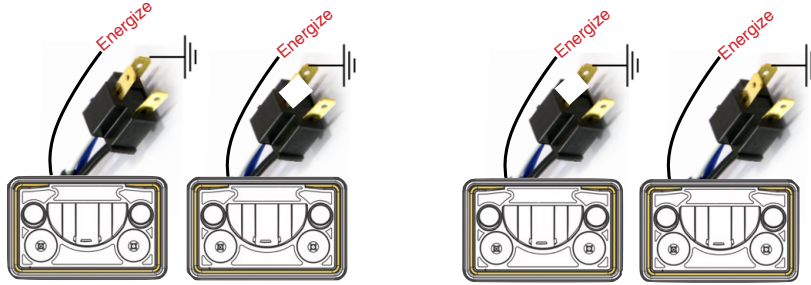

LED Daytime Running Light / Conspicuity Lamp

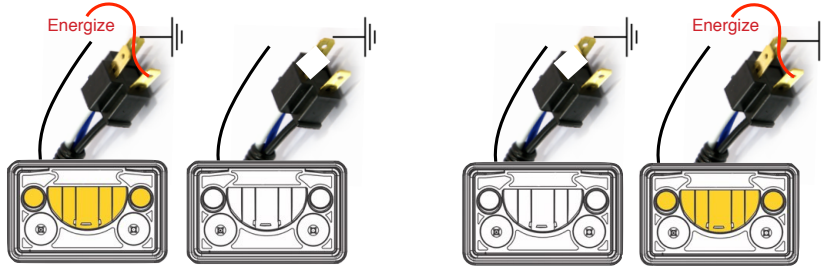

DOT Low Beam

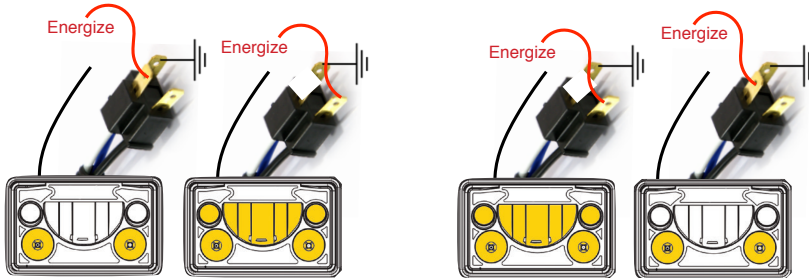


DOT High Beam

Updated 6/9/17



Scan me
FIRETECH HEADLIGHT INSTALL VIDEO

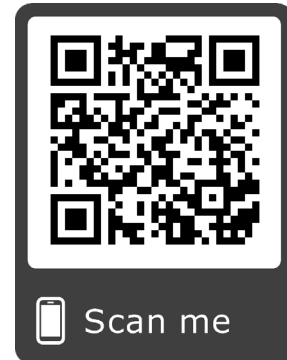

Scan me
ABOUT THE FIRETECH HEADLIGHT